# Single Phase 0.37KW - 4KW Variable Speed Frequency Drive



Please Select a Power Output from the Drop-Down Box Above

Single Phase 0.37KW - 4KW VSD VFD Variable Speed Frequency Drive Inverter

### **Main Features:**

- Advanced motor control algorithm
- High performance open loop vector control
- Optimal V/F mode
- Excellent ramp slope control
- Fast auto-tune (less than 1 minute)
- Overload: 150% rated output current, 1 minute
- Low frequency torque: 0.5Hz: 100% rated torque, 1Hz: 150% rated torque
- Standard configuration 5-digit LED keypad, standard RJ45 Keypad connector
- Wireless fan block design, easy to replace or maintain

# 200V - 220V Rating Data

Motor Power (kW)	Drive Power Size (kVA)	Rated Input Current (A) 1/3PH	Rated Output Current (A)	Default Carrier Frequency (kHz)	Size
0.75	1.9	12.8/7.1	5	6	A
1.5	3.0	20.5/11.3	8	6	Α
2.2	4.2	24/14.5	11	6	В
4	6.7	16.5	17.6	6	С

# **General Technical Data**


		200V (-10%)~240V (+10%) 1/3 PH	
Input power	Input voltage U <sub>in</sub>	380V (-10%)~480V (+10%) 3PH	
		500V (-10%)~690V (+10%) 3PH	
	Input frequency	50Hz/60Hz(±2Hz)	
	Maximum supply imbalance	≤3%	
Power output	Output voltage	0V~U <sub>n</sub>	
	Output frequency	0Hz~300Hz	
	Voltage control	V/F, Open loop Vector Control	
	Switching frequency	1kHz~15kHz	
	Adjust speed range	Open loop vector control -1:100, V/F mode -1:50	
	Start torque	0.5Hz: 100% rated torque 1Hz: 150% rated torque	
	Torque accuracy	7%	
	Reference resolution	Digital- 0.01Hz, Analogue- 0.1%×Maximum frequency	
	Acce. & Dece. rate	0.1s~3600min	
	Voltage boost	0.1%~30.0%	
Main performance function	Overload	E, G type: 150% rated output current, 1 minute P type: 110% rated output current, 1 minute	
	V/F	4 types: V/F (user can program) and ramp (2.0 power, 1.7 power, 1.2 power)	
	DC injection	Injection frequency: 0.0%~100.0% maximum frequency Injection current: 0.0%~300.0% rated current Injection time: 0.00s~60.00s	
	Dynamic braking	The utilization rate of dynamic braking : 0.0% $\sim$ 100.0%	
		Jog frequency: 0.00Hz~maximum frequency	
	Jog	Jog acceleration rate: 0.1s∼600.0s  Jog interval time: 0.1s∼600.0s	
	Preset	16 preset speeds (decided by control terminals)	
	AVR	Maintain the rated output voltage when the input power supply voltage changed	
	Textile	For textile machines control	
	Simple PLC	Onboard PLC	
	Length control	Winding control	
Special function	PID control	Process control (reference close loop control)	
	Advanced function blocks	2 logic control blocks	
		1 binary selector	
		2 threshold control blocks	
		3 variable selectors	

# **General Technical Data**

# **General Technical Data**

		Digit: Keypad, motorized pot (E-Pot), pulse, comms.	
Control terminal	Reference source	Analogue: Al1: 0V~10V, 0(4) mA~20mA;	
		Al2: 0V~10V	
	Operating mode	Keypad, Control terminal, Serial comms.	
	Digital input	DI1~DI7: Programmable terminals and DI6 can be set as pulse input, 0Hz~60Hz; DI7 can be	
	terminals	high frequency pulse input (1Hz~50.0kHz) or PTC thermistor input	
	Digital output terminals	DO1 $\sim$ DO2: Programmable terminals, Max. output current: 50mA, DO2 can be the terminal to output pulse ( $0.1$ kHz $\sim$ 50.0kHz ), and output PWM	
	Analogue output Terminals	AO1: programmable terminal, 0V~10V	
	Status relay	2 programmable relays, contactor data:	
		AC250V/2A (COS φ=1) AC250V/1A (COS φ=0.4)	
		DC30V/1A	
Comms.	Connector	2 terminals (A&B) and RJ45 port	
Commis.	Protocol	Modbus RTU	
	Altitude	1000m rated 1000m~3000m,1% rated current derating per 100m	
	Operating temperature	−10℃~+40℃	
Environment	Maximum humidity	≤90%RH, no-condensing	
Livioniion	Vibration	≤5.9m/s² (0.6g)	
	Storage temperature	-40℃~+70℃	
	Running environment	Indoor, non-flammable, no corrosive gasses, no contamination with electrically conductive material, avoid dust which may restrict the fan	
Optional module		LCD Keypad, HDOM-232, HDOM-USB, Profibus module, Keypad pallet, HDSOFT (PCTools), etc.	
Protection		Output shortage, over current, over load, over voltage, under voltage, phase loosing, over heat (heatsink and junction), external trip, etc.	
Efficiency		1.5kW and below: ≥89%	
		2.2kW~22kW: ≥93% 30kW and above: ≥95%	
Mounting method		Surface mounting, through hole, cubicle standing	
Enclosure		IP 20, IP21 (by adding optional device)	
Cooling method		220V/ 0.4kW model is nature cool, others are forced air cool	
		The state of the s	

# **Typical Cabling**

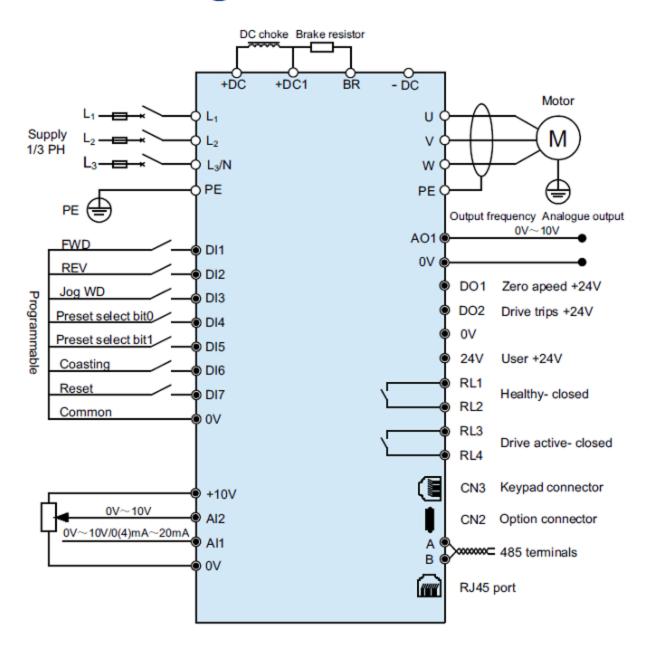

#### Note:

- All the programmable control terminal functions are factory default set;
- For control wire, recommend using unshielded twisted pair, shielded cable or shielded twisted pair;
- 5.5kW~ 280kW models (including 220V/4kW, except size E1 models), internal DC choke is fitted. 315k models with AC reactor fitted.

We do not deliver to PO Boxes. Please make sure you have a residential address in your details for us to send your order to.

# Local Pick up from our Sydney, Prestons Warehouse available.

You are buying from a professional Business with many years experience in this market. DO NOT compare this product with other cheaper prices or even same prices. This is commercial quality. Limited Time Offer. QUALITY at the right PRICE. This crazy price will not last long.

## Payment Methods Accepted



### **Listing Details**

When making a purchase from any of our eBay listings you are entering into a contract governed by our terms & conditions below. Please ensure you have read these before making your purchase.

Images shown are for demonstration purposes only. Product will match description but may vary from images shown. For any concerns about how a product looks please contact us before ordering.

The item description/price/stock levels is accurate to our knowledge. All errors or omissions are unintentional. If problems are encountered, please contact us.

### **Payment**

Full payment is required within 5 days of sale. Payment can be made by Cash on pick-up (from our Warehouse), Paypal, credit card (over the phone) or bank deposit. Items will not be shipped out unless payment has been made in full.

### Shipping/Delivery/Pick up

Please refer to our shipping tab at the top of our listing for all freight costs and delivery times. Your order will be sent through one of our delivery partners which include Toll, TNT, Couriers Please, E-Go, Go Logistics and Australia Post. The service used to deliver your order will be automatically selected by our freighting system. We assume no liability for postal delays or

lost/damaged parcels, but we will assist the buyer to locate or to obtain a replacement.

We require a valid street address for all deliveries. We do NOT deliver to PO Boxes, Parcel Lockers or Post Office addresses. We also require a daytime phone number for all orders. Our operation hours for dispatch are Monday to Friday 9am to 2:30pm. In the unlikely case that you do not receive your order, please contact us to resolve this.

Local Pickup from our Sydney, Prestons Warehouse available.

### Warranty

Warranty periods are as follows:

- All remotes and receivers have 3 months warranty
- Garage door and gate motors have 12 months warranty
- All other products have 6 months warranty

If you have a problem with the product, please contact us through eBay and include the original purchase information (i.e. your name, address, email and purchase receipt number)

Warranty does not include damage caused by normal wear and tear, accidents, misuse, lack of maintenance, neglect, natural disaster, or other external causes; to damage caused by operating the equipment in a manner outside that described in the instructions. The warranty is considered void if the item has been modified, altered or tampered with by a person(s) not authorised by us to provide service (with the exception of standard periodic maintenance). Consumables and accessories such as chains, carry bags, batteries, hoses, grinding discs, belts, cables, wheels, blades, tubs, pads, nets etc. are also not covered once used or for damage caused by general wear and tear.

Until the nature of any fault is determined, the resolution we can offer may vary. To assist with a quick resolution, photos of the damaged part/unit will be required for verification. We will repair or replace, at our discretion, any unit determined to be within the warranty period. Where necessary, the item may need to be returned to repair the fault/issue.

The buyer will be liable for all shipping costs associated with any warranty claim.

All returns for warranty must first be authorised in writing by our Customer Service Team and given a Return Authorisation Number (RAN). We will not accept the return of any item/s without a Return Authorisation Number (RAN).

When a return is authorised, it is the buyer's responsibility to ensure the product is packaged securely to prevent any damage during the return process. Failure to do so may affect the resolution to be offered, which may include repairs, replacement items or store credit at our discretion.

For all warranty claims, the outcome of the inspection should take no longer than 10 business

days from the date the item is received by our service department (times may vary).

Warranty claims will not be accepted in cases where the buyer has contributed to the failure, or been misleading in their description of their issues. In these instances, where freight costs were incurred by us to return your item for inspection, reimbursement to us may be required prior to releasing the goods. The item is also to be returned to the buyer at the buyer's expense. Freight cost not to exceed original freight cost. Payment is to be made to us within 7 days of being notified of warranty rejection. Storage fees to apply beyond 7 days at 5% per week of the original product cost until the credit expires. Where money is owed to us for repairs and/or postage, we will be entitled to hold onto the item until payment is made.

### **Returns/Exchanges**

Returns or exchanges must be made within 7 days of the delivery date. After 7 days, any claims of delivery errors or requests for returns or exchanges will not be accepted.

Products may be returned/exchanged provided that the item(s) are returned in an unused, clean, sellable condition with original packaging, subject to our discretion.

If the item has sustained damage in transit, or is not returned as noted above, a revised refund amount may be required.

All returns will be refunded less the delivery cost. All exchanges will incur a return delivery fee.

We reserve the right as final authority on whether the products should be refunded or replaced and make no other warranty and no implied warranties, including any warranty of merchantability or fitness for a particular purpose. Our maximum liability hereunder is limited to the purchase price of the products. In no event shall we be liable for any consequential, indirect, incidental or special damages of any nature arising from the sale of the product.

If you accept these terms and with to return an item, please send us a message stating your name, order number, the item(s) you wish to return, and the reason for the return. Our Customer Service team will respond to your email and, if applicable, written authorisation for the return will be given. All other relevant information will also be given to you at this time. We will not accept the return of any item(s) without our prior authorisation.

#### **Contact Us**

If you any questions or enquiries, please send us a message through eBay.

#### Feedback

At MTM we strive to maintain an excellent customer service so if you have any issues or inquiries about your purchase, please feel free to contact us before leaving feedback and we would be happy to help. Please do not leave negative feedback before contacting us.

Any negative feedback left without any contact will be regarded as an indication of the conclusion of the transaction.

By placing a bid or buying, you have agreed to all the conditions mentioned above.